



KINTEK SOLUTION

Graphitization Furnace Catalog

Contact us for more catalogs of [Sample Preparation](#), [Thermal Equipment](#), [Lab Consumables & Materials](#), [Bio-Chem Equipment](#), etc...

KINTEK SOLUTION

COMPANY PROFILE

>>> About Us

Kintek Solution Ltd is one technology orientated organization, team members are devoted to probing the most efficient and reliable technology and innovations in the scientific researching equipment, fields like biochemical reacting, new materials researching, heat treatment, vacuum creating, refrigerating, as well as pharmaceutical and petroleum extracting equipment.

In the past 20 years, we earned rich experiences in this researching equipment field, we are capable to supply both the equipment and solution according to customer's needs and realities, we have also developed lots of customer tailored equipment according to a specific working purpose, and we have lots of successful projects in many universities and institutes from different countries, like Asia, Europe, North and South America, Australia and New Zealand, Middle East, and Africa.


Profession, quick response, hard working, and sincerity is a remarkable label of our team members working attitude, which earn us a sound reputation among our clients.

We are here and ready to service our clients from different countries and regions, and share the most efficient and reliable technology together!



Horizontal High Temperature Graphitization Furnace

Item Number: GF-01

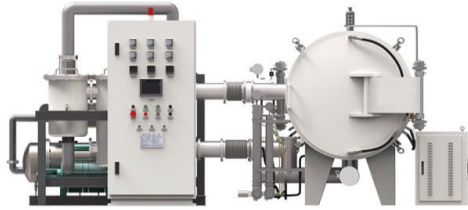

Introduction

Horizontal Graphitization Furnace: This type of furnace is designed with the heating elements placed horizontally, allowing for uniform heating of the sample. It's well-suited for graphitizing large or bulky samples that require precise temperature control and uniformity.

[Learn More](#)

Product model specifications	GF-01-40×40×120	GF-01-50×50×140	GF-01-55×55×160
Volume(L)	192	350	484
Rated temperature(°C)	2800	2800	2800
Limit temperature(°C)	3100	3100	3100
Effective heating area (mm)	400×400×1200	500×500×1400	550×550×1600
Power(KW)	200	350	450
Frequency(HZ)	1500	1000	1000
Temperature control method	Adopt Japanese Shima Electric thermostat		
Heating method	Induction heating		
Vacuum system	Rotary vane vacuum pump (for high vacuum requirements, Roots vacuum pump and oil diffusion pump are required)		
Sintering atmosphere	N ₂ , Ar and other gases		
Rated power supply voltage (V)	380		
Rated heating voltage (V)	750		
Vacuum limit (Pa)	100 (vacuum cold state)		

Igbt Experimental Graphitization Furnace

Item Number: GF-02



Introduction

IGBT experimental graphitization furnace, a tailored solution for universities and research institutions, with high heating efficiency, user-friendliness, and precise temperature control.

[Learn More](#)

Product model specifications	GF-02- Φ 10 \times 15	GF-02- Φ 20 \times 30	GF-02- Φ 30 \times 40
Volume(L)	1.1	10	28
Limit temperature(C)	3100	3100	3100
Effective heating area (mm)	Φ 100 \times 150	Φ 200 \times 300	Φ 300 \times 400
Power(KW)	30	50	80
Frequency(HZ)	4000	2500	2500
Temperature control method	Japan Shima Electric Thermostat		
Heating method	Induction heating		
Vacuum system	Rotary vane vacuum pump (for high vacuum requirements, Roots vacuum pump and oil diffusion pump are required)		
Sintering atmosphere	N ₂ , Ar		
Rated power supply voltage (V)	380		
Rated heating voltage (V)	According to the design determination, configure the transformer		
Vacuum limit (Pa)	100 (vacuum cold state)		

High Thermal Conductivity Film Graphitization Furnace

Item Number: GF-03



Introduction

The high thermal conductivity film graphitization furnace has uniform temperature, low energy consumption and can operate continuously.

[Learn More](#)

Product model specifications	GF-03-Φ40×100	GF-03-Φ50×100	GF-03-Φ60×100	GF-03-Φ90×160
Volume(L)	125	196	282	1000
Rated temperature(C)	2800	2800	2800	2800
Limit temperature(C)	3100	3100	3100	3100
Effective heating area (mm)	Φ400×1000	Φ500×1000	Φ600×1000	Φ900×1000
Power(KW)	150	200	30	600
Frequency(HZ)	1500	1000	1000	1000
Temperature control method	Japan Shima Electric Thermostat			
Heating method	Induction heating			
Vacuum system	Rotary vane vacuum pump (for high vacuum requirements, Roots vacuum pump and oil diffusion pump are required)			
Sintering atmosphere	N ² Ar and other gases			
Rated power supply voltage (V)	380			
Rated heating voltage (V)	750			
Vacuum limit (Pa)	100 (vacuum cold state)			

Negative Material Graphitization Furnace

Item Number: GF-04



Introduction

Graphitization furnace for battery production has uniform temperature and low energy consumption. Graphitization furnace for negative electrode materials: an efficient graphitization solution for battery production and advanced functions to enhance battery performance.

[Learn More](#)

Product model specifications	GF-04-Φ40×100	GF-04-Φ50×100	GF-04-Φ60×100	GF-04-Φ70×140	GF-04-Φ90×160	GF-04-100×200
Volume(L)	125	196	282	550	1000	1500
Rated temperature(C)	2800	2800	2800	2800	2800	2600
Limit temperature(C)	3100	3100	3100	3100	300	2800
Effective heating area (mm)	Φ400×1000	Φ500×1000	Φ600×1000	Φ700×1400	Φ900×1600	Φ1000×2000
Power(KW)	150	250	350	550	700	1000
Frequency(HZ)	1500	1000	1000	1000	1000	1000
Temperature control method	Japan Shima Electric Thermostat					
Heating method	Induction heating					
Vacuum system	Rotary vane vacuum pump (for high vacuum requirements, Roots vacuum pump and oil diffusion pump are required)					
Sintering atmosphere	N ² Ar and other gases					
Rated power supply voltage (V)	380					
Rated heating voltage (V)	750					
Vacuum limit (Pa)	100 (vacuum cold state)					

Vertical High Temperature Graphitization Furnace

Item Number: GF-05



Introduction

Vertical high temperature graphitization furnace for carbonization and graphitization of carbon materials up to 3100°C. Suitable for shaped graphitization of carbon fiber filaments and other materials sintered in a carbon environment. Applications in metallurgy, electronics, and aerospace for producing high-quality graphite products like electrodes and crucibles.

[Learn More](#)

Product model specifications	GF-05-Φ40×100	GF-05-Φ50×100	GF-05-Φ60×100	GF-05-Φ70×140	GF-05-Φ90×160	GF-05-Φ100×200
Volume(L)	125	196	282	550	1000	1500
Rated temperature(C)	2800	2800	2800	2800	2800	2600
Limit temperature(C)	3100	3100	3100	3100	300	2800
Effective heating area (mm)	Φ400×1000	Φ500×1000	Φ600×1000	Φ700×1400	Φ900×1600	Φ1000×2000
Power(KW)	150	200	300	500	600	800
Frequency(HZ)	1500	1000	1000	1000	1000	1000
Temperature control method	Japan Shima Electric Thermostat					
heating method	Induction heating					
Vacuum system	Rotary vane vacuum pump (for high vacuum requirements, Roots vacuum pump and oil diffusion pump are required)					
sintering atmosphere	N ² Ar and other gases					
Rated power supply voltage (V)	380					
Rated heating voltage (V)	750					
Vacuum limit (Pa)	100 (vacuum cold state)					

Bottom Discharge Graphitization Furnace For Carbon Materials

Item Number: GF-06



Introduction

Bottom-out graphitization furnace for carbon materials, ultra-high temperature furnace up to 3100°C, suitable for graphitization and sintering of carbon rods and carbon blocks. Vertical design, bottom discharging, convenient feeding and discharging, high temperature uniformity, low energy consumption, good stability, hydraulic lifting system, convenient loading and unloading.

[Learn More](#)

Product model specifications	GF-06-Φ40X100	GF-06-Φ50X100	GF-06-Φ60X100	GF-06-Φ70X140	GF-06-Φ90X160	GF-06-100X200
Volume(L)	125	196	282	550	1000	1500
Rated temperature(C)	2800	2800	2800	2800	2800	2600
Limit temperature(C)	3100	3100	3100	3100	300	2800
Effective heating area (mm)	Φ400×1000	Φ500×1000	Φ600×1000	Φ700×1400	Φ900×1600	Φ1000×2000
Power(KW)	150	200	300	500	600	800
Frequency(HZ)	1500	1000	1000	1000	1000	1000
Temperature control method	Japan Shima Electric Thermostat					
heating method	Induction heating					
Vacuum system	Rotary vane vacuum pump (for high vacuum requirements, Roots vacuum pump and oil diffusion pump are required)					
sintering atmosphere	N ² Ar and other gases					
Rated power supply voltage (V)	380					
Rated heating voltage (V)	750					
Vacuum limit (Pa)	100 (vacuum cold state)					

Continuous Graphitization Furnace

Item Number: GF-07



Introduction

High-temperature graphitization furnace is a professional equipment for graphitization treatment of carbon materials. It is a key equipment for the production of high-quality graphite products. It has high temperature, high efficiency and uniform heating. It is suitable for various high-temperature treatments and graphitization treatments. It is widely used in metallurgy, electronics, aerospace, etc. industry.

[Learn More](#)

Product model specifications	GF-07-10×20×50	GF-07-10×40×100	G7-06-10×60×200
Rated temperature(C)	2500	2500	2500
Effective heating area (mm)	100×200×500	100×400×1000	100×600×2000
Power(KW)	80	150	300
Frequency(HZ)	2500	2500	1000
heating method	Induction heating		
Import and export cooling	Cooling zones of 500-1000mm are set up at the entrance and exit respectively.		
Import and export gas protection	Set up 500-1000mm gas sealing areas at the inlet and outlet respectively		
Temperature measurement method	1000-3200C infrared optical temperature measurement		
Insulation part	Hard carbon felt+soft carbon felt		
gas flow	2-6m/h		
Oxygen content detection	Using Shaanxi Fein oxygen content analyzer, real-time detection of oxygen content and dew point real-time analyzer		

Large Vertical Graphitization Furnace

Item Number: GF-08



Introduction

A large vertical high-temperature graphitization furnace is a type of industrial furnace used for the graphitization of carbon materials, such as carbon fiber and carbon black. It is a high-temperature furnace that can reach temperatures of up to 3100°C.

[Learn More](#)

Product model specifications	GF-08-Φ80X140	GF-08-Φ90X160	GF-08-Φ100X200	GF-08-Φ120X200
Volume(L)	703	1000	1500	2260
Rated temperature(C)	2800	2800	2600	2600
Limit temperature(C)	3100	3100	2800	2800
Effective heating area (mm)	Φ800×1400	Φ900×1600	Φ1000×2000	Φ1200×2000
Power(KW)	500	600	800	1200
Frequency(HZ)	1000	1000	1000	1000
Discharging method	Upper discharge/lower discharge			
Temperature control method	Japan Shima Electric Thermostat			
heating method	Induction heating			
Vacuum system	Rotary vane vacuum pump (for high vacuum requirements, Roots vacuum pump and oil diffusion pump are required)			
sintering atmosphere	N ² Ar and other gases			
Rated power supply voltage (V)	380			
Rated heating voltage (V)	750			
Vacuum limit (Pa)	100 (vacuum cold state)			

Ultra-High Temperature Graphitization Furnace

Item Number: GF-09



Introduction

The ultra-high temperature graphitization furnace utilizes medium frequency induction heating in a vacuum or inert gas environment. The induction coil generates an alternating magnetic field, inducing eddy currents in the graphite crucible, which heats up and radiates heat to the workpiece, bringing it to the desired temperature. This furnace is primarily used for graphitization and sintering of carbon materials, carbon fiber materials, and other composite materials.

[Learn More](#)

Power supply capacity	60KVA
Power supply	4000~8000Hz (automatic tracking)
Temperature	3000°C
Temperature control accuracy	±2°C
Temperature measurement method	1100°C~3000°C
Effective working area size	Φ200×200 mm (diameter×height)
Cold ultimate vacuum degree	133Pa
Pressure rise	3.0 Pa/h
Protective atmosphere	Argon Nitrogen
Inflation pressure	≤ 0.03MPa
Material in and out method	Top loading and discharging
Heating conditions	Atmosphere sintering (inert gas)



Kintek Solution

Head Quarter: No.89 Science Avenue, High-Tech Zone,
Zhengzhou, China

Hongkong Office: 300 Lockhart Road, Wan Chai,
Hongkong

Canada Office: Boulevard Graham, Mont-Royal, QC, H3P
2C7, Canada

